

EMERGENCY ORDER


**(Regarding the Emergency Repair of a Drainage Culvert on
10th Street between 16th Avenue and Wansley Road)**

WHEREAS, Mayor Johnny Magee was notified by the Public Works Director that the drainage culvert on 10th Street between 16th Avenue and Wansley Road must be replaced as it poses an immediate threat to the integrity of this portion of 10th Street due to severe erosion at the site; and

WHEREAS, §31-7-13(k) of the Mississippi Code of 1972 Annotated gives authority to the Mayor, acting as an agent of the City to order the immediate remediation of circumstances which threaten the safety and welfare of the citizens of the city, with ratification of said actions to be granted by the council at the next regularly scheduled meeting


NOW THEREFORE, I, Johnny Magee, Mayor of the City of Laurel, acting under the authority granted by §31-7-13(k) of the Mississippi Code of 1972 Annotated, do hereby order that Walters Construction is authorized to replace the drainage culvert on 10th Street, between 16th Avenue and Wansley Road. The total estimated cost of this project is two hundred ten thousand five hundred thirteen dollars and sixty cents. (\$210,513.60) (See Exhibit A)

SO ORDERED on this the 20th day of APRIL, A.D. 2026.



Johnny Magee, Mayor

ATTEST:



Kristal Jones, City Clerk



EXHIBIT A

WALTERS CONSTRUCTION COMPANY, INC.

2051 Highway 84 East • Laurel, MS 39443
Phone 601-428-5515 - Fax 601-425-5334

david.d@waltersconstructionco.com

QUOTE

To: **City of Laurel**
Attn: **Tony Wheat, Public Works Director**
401 N. 5th Avenue
Laurel, MS 39440

Quoted by: **David Dodd**
Estimator/Project Manager
Cell: 601-606-4798

Job: **West 10th Street Drainage Repair**
Laurel, Mississippi

Date: **April 14, 2026**

Item	Description	Quantity	Unit	Unit Price	Total Price
Work Items - Labor & Equipment Only:					
10	MOBILIZATION				
20	SET UP & MAINTAIN TRAFFIC CONTROL	1.00	L.S.	\$5,375.00	\$5,375.00
30	REMOVE ASPHALT PAVEMENT	15.00	DAY	\$875.00	\$13,125.00
40	REMOVE FAILED 73" x 45" CMPA CROSS DRAIN	100.00	S.Y.	\$14.75	\$1,475.00
50	REMOVE FAILED 24" CPP PIPE SIDE DRAIN	60.00	L.F.	\$129.50	\$7,770.00
60	REMOVE DRAINAGE STRUCTURES	1.00	L.S.	\$280.00	\$280.00
70	INSTALL & MAINTAIN BYPASS PUMPING	2.00	EACH	\$1,360.00	\$2,720.00
80	EXCESS EXCAVATION	15.00	DAYS	\$865.00	\$12,975.00
90	INSTALL SELECT FILL, CL9 GP C LVM	250.00	C.Y.	\$16.50	\$4,125.00
100	INSTALL NEW 73" x 45" RCPA CROSS DRAIN	400.00	C.Y.	\$58.40	\$23,360.00
110	INSTALL NEW 24" CPP SIDE DRAIN	64.00	L.F.	\$265.00	\$16,960.00
120	CLASS B CONCRETE (MINOR STRUCT)	20.00	L.F.	\$102.00	\$2,040.00
130	REINFORCING STEEL(INCL REBAR)	11.00	CY	\$2,950.00	\$32,450.00
140	CONNECT 24" CPP TO DOWNSTREAM. 73" x 45" HEADWALL	1,000.00	LB	\$3.50	\$3,500.00
150	INSTALL TYPE V NON WOVEN FILTER CLOTH	1.00	EACH	\$775.00	\$775.00
160	INSTALL 200# RIP RAP	225.00	S.Y.	\$3.80	\$855.00
170	INSTALL RIP RAP GROUT	150.00	TON	\$85.50	\$12,825.00
180	GRASS & MULCH	50.00	C.Y.	\$97.64	\$4,882.00
190	INSTALL #610 LIMESTONE IN ROADWAY CUT	0.25	ACRE	\$5,000.00	\$1,250.00
200	BASE REPAIR UNCLASSIFIED EXCAVATION (1-0)	40.00	TON	\$38.25	\$1,530.00
210	HOT PLANTMIX BASE ASPHALT -PATCHING IN PLACE w/HAUL (1-I)	15.00	CY	\$140.00	\$2,100.00
220	HOT PLANTMIX SURFACE ASPHALT -PATCHING IN PLACE w/HAUL (1-H)	11.00	TON	\$180.00	\$1,980.00
		8.00	TON	\$190.00	\$1,520.00
Subtotal - Estimated Labor & Equipment					\$153,872.00
Material Cost Supplied by Walters Construction					
300	SELECT FILL (MATERIAL ONLY FOB JOBSITE)	400.00	C.Y.	\$15.00	\$6,000.00
310	TYPE V GEOTEXTILE (MATERIAL ONLY FOB JOBSITE)	225.00	S.Y.	\$1.20	\$270.00
320	200# RIP RAP (MATERIAL ONLY FOB JOBSITE)	150.00	TON	\$75.00	\$11,250.00
330	RIP RAP GROUT (MATERIAL ONLY FOB JOBSITE)	50.00	C.Y.	\$233.86	\$11,693.00
340	CLASS B READY MIXED CONCRETE	11.00	C.Y.	\$330.00	\$3,630.00
350	24" N12 HDPE PIPE (MATERIAL ONLY FOB JOBSITE)	20.00	L.F.	\$38.32	\$766.40
360	73" X 45" REINFORCED CONCRETE ARCH PIPE	64.00	L.F.	\$254.80	\$16,307.20
370	WASHED GRAVEL (FOB JOBSITE)(PIPE BEDDING)(2-E)	75.00	TON	\$55.00	\$4,125.00
380	#610 LIMESTONE BASE (FOB JOBSITE)(2-S)	40.00	TON	\$65.00	\$2,600.00
Subtotal - Estimated Material					\$56,641.60
Grand Total Labor, Equipment, Material					\$210,513.60

EXHIBIT A

Annual Bid
ommission order

PROPOSAL CONDITIONS

Price Includes:

1. All items as listed above,
2. Insurance
3. Rental Equipment (Concrete Pumping Equipment w/Operator)
4. Maintenance of Traffic if needed is included.
5. Reinforcing Bar included for item 130
6. 1 Mobilization/Demobilization is included. Additional Mobilizations will be \$1,500.00 each
6. Final site Cleanup with Seeding & Mulching
7. Asphalt Stone Base(6" thick), Asphalt Base (3" thick), & Asphalt Surfacing (2" thick) across roadway.
8. Item 60 includes removal of 73" x 45" x 24" junction box and 73" x 45" FES
9. Class B Minor Structure Concrete includes 2 each 73" x 45" Headwalls & 1 each 24" Pipe Collar
10. Roadway will be closed while laying new 73" x 45" RCPA, and will be opened once the backfill and stone surfacing are in place.
11. Since we are replacing existing lines, we assume that utility conflicts will be minimalized.

Price Excludes:

1. Removal and replacement of any unsuitable existing material (other than specified).
2. Tax
3. Bond
4. Testing
5. Any items not listed in description above.

Additional Notes and Pricing:


1. We appreciate the opportunity to bid your project and look forward to working with you on any future projects.
2. The quote is based upon our conversations, site visit, and anticipated scope of work.
3. The quoted price is good for 30 days after proposal date and may be withdrawn if not accepted within a reasonable time determined by Walters Construction Co., Inc.
4. This quote is a Unit Price quote for the described scope of work. Quote contains necessary mobilizations added to respective bid items.
5. All items on the above Quote and Proposal Conditions will become part of the contract/subcontract.
6. We estimate about 20-24 working days will be required to complete the above work on this project.
7. The above pricing is for budgeting. If accepted, billing for the work will be done per annual bid rates.

Acceptance of Proposal- The above prices, specifications and proposal conditions are satisfactory and are hereby accepted. You are authorized to perform the work specified.

4.20.26

Date of Acceptance:


Acceptance Signature

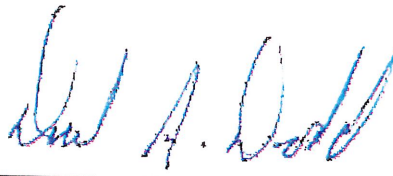
Authorized Signature